



MANUAL GUIDE

Smart garden 6

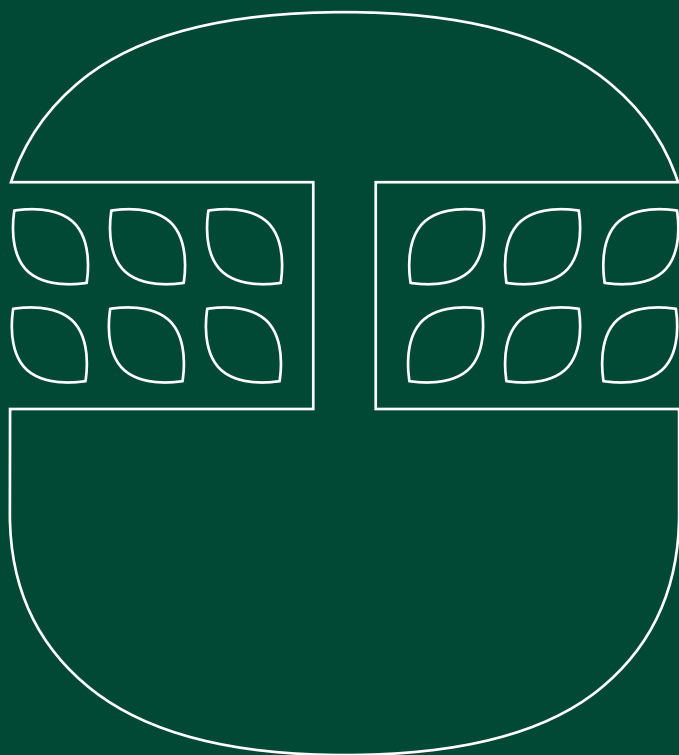

plantui


PARTS

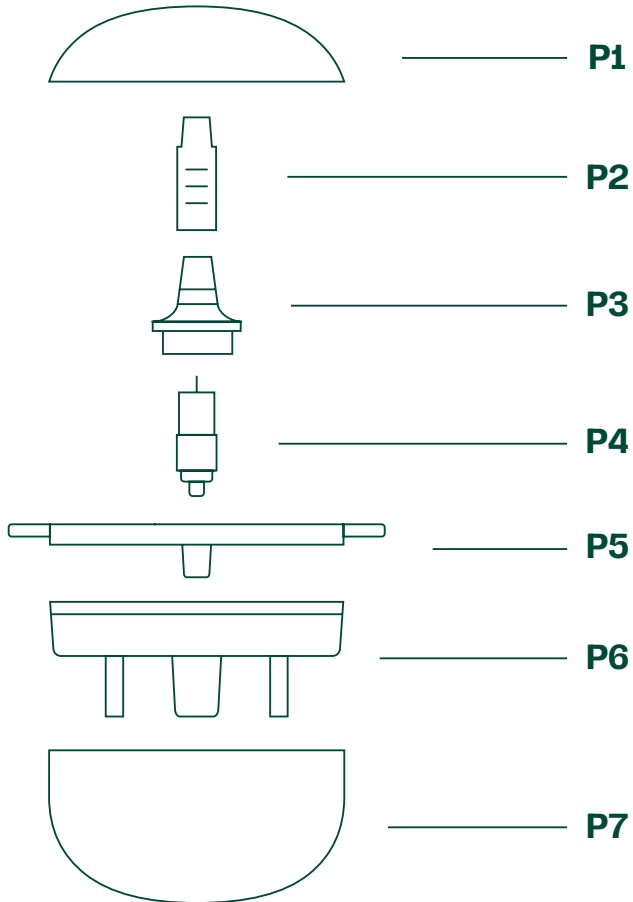

P1 LIGHT HAT **P2** HEIGHT BLOCK **P3** LOCK UNIT **P4** WATER PUMP
P5 PLANT TRAY **P6** WATER TRAY **P7** WATER BOWL


SETTING UP

①



Add 3 liters of water with 3 spoonfuls of nutrients to the water bowl. The pump will take care of the mixing.

②




Make sure that the pre-assembled center part (**P3**, **P4**, **P5** and **P6**) is firmly locked. Then place into the water bowl.

③




Separate each capsule using scissors and remove the center label. Make sure that the seeds don't fall out and are not attached to the label.

④




Place the capsules in all empty holes in the plant tray. Don't fill the 7th hole, which is a watering hole.

⑤



Plug in the device with the Plantui charger.


⑥




Put on the light hat without a height block. Pink light turns on, the germination phase has begun.

TAKING CARE


SETTING THE SLEEP / AWAKE MODE



Plantui Smart Gardens sleep 8 hours daily. They will go automatically to sleep after 16 hours from turning it on.




Set the sleep timer by holding your hand on top of the light unit for 3 sec. Lights will blink 2 times and then turn off.



The device will wake up after 8 hours and keep this rhythm if you don't change it.


LIVING WITH YOUR PLANTS



Add the first height block when the first leaves appear. Add the second height block before the leaves touch the light hat.




You can start using the plants when they are big enough. Instructions and harvest times can be found at plantui.com.




Swipe your hand on top of the light hat to temporarily turn the light off. It will stay off based on the time you set. Swipe again to turn it back on.

TAKING CARE

ADD WATER AND NUTRIENTS

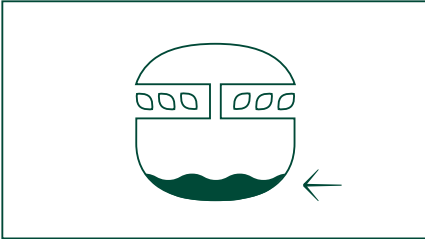


If the pump starts being noisy the water level is too low. You can check the water level by lifting up the center part (**P3, P4, P5 and P6**). When the water has run out the light will start flashing.

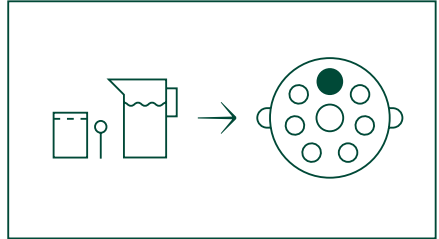


Add 2 spoonfuls of Plantui nutrients to the water hole then slowly pour 2 liters of water in the hole. The pump will take care of mixing the nutrients.


CLEANING YOUR DEVICE



Wash the water bowl, plant tray and water tray with water (max 55°C) after each crop. You can wash them by hand or in the dishwasher. Do not wash the electrical parts.



Clean the calcium deposit with citric acid: add 1 tablespoon of citric acid and 3 liters of warm water (max 55°C).



Hold your hand on top of the light hat for 15 s until the light turns blue, the pump will turn on and operate for 2.5 min. Leave it to soak for a few hours, then clean it properly before use.

FOLLOW US




Plantui
Plantui Owners (group)




@plantuiofficial

PLANTUI.COM – HI@PLANTUI.COM


NOTICES / ADVICES



Visit **plantui.com** for new and exciting plant varieties and flavors.



Do not place the Smart Garden on a tilted surface.



Do not place the Smart Garden in direct sunlight or outside.

plantui